dacor The Life of the Kitchen®

Double, Distinctive Wall Oven

PLANNING GUIDE

Product tolerances: ±1/16" (±1.6 mm) unless otherwise stated

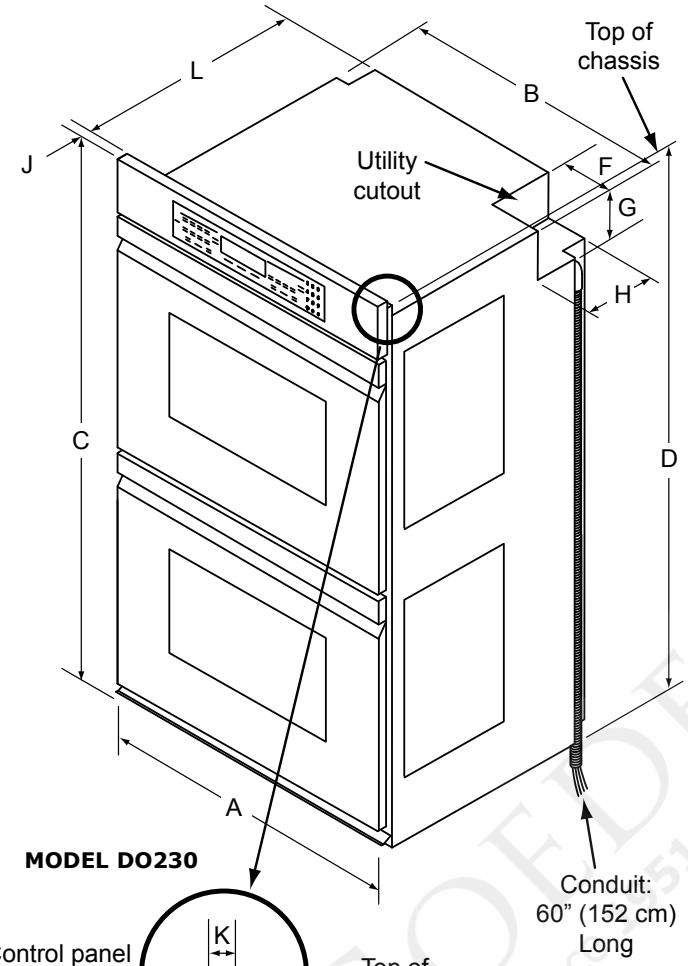

MODEL DO230



⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- This appliance must be installed in accordance with the accompanying installation instructions.

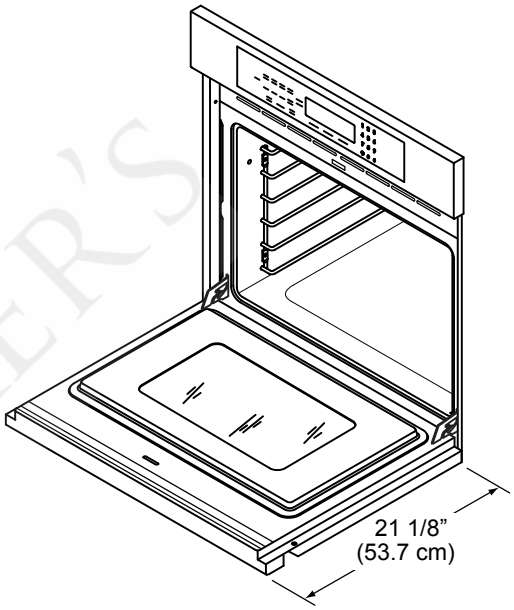

(A) Overall Width	(B) Chassis Width	(C) Overall Height	(D)* Chassis Height	(E) Control Panel Overlay
29 3/4" (75.6 cm)	28 3/8" (72.1 cm)	49 15/16" (126.8 cm)	49 1/16" (124.6 cm)	15/16" (2.4 cm)

* To top of chassis notch behind control panel

(F) Utility Cutout Width	(G) Utility Cutout Height	(H) Utility Cutout Depth	(J) Control Panel Depth	(K) Notch Depth	(L) Chassis Depth	(M) Notch Height
5" (12.7 cm)	5 ¼" (13.3 cm)	6" (15.2 cm)	1" (2.5 cm)	1 5/8" (4.1 cm)	24" (61.0 cm)	1" (2.5 cm)

ELECTRICAL SPECIFICATIONS	
Dedicated Circuit Requirements	**Total Connected Load**
240 Vac 60 Hz., 4-wire,** 40 Amp.	7.8 kW (33 Amp.)

** Two 120 Vac hot (L1 and L2), one neutral, one ground.

The above specifications are for reference only. See the appliance data plate for exact specifications.

Family Owned American Made

GOEDEKER'S Visited since 1951

Cabinet/countertop tolerances: +1/16”, -0, (+1.6 mm, -0) unless otherwise stated

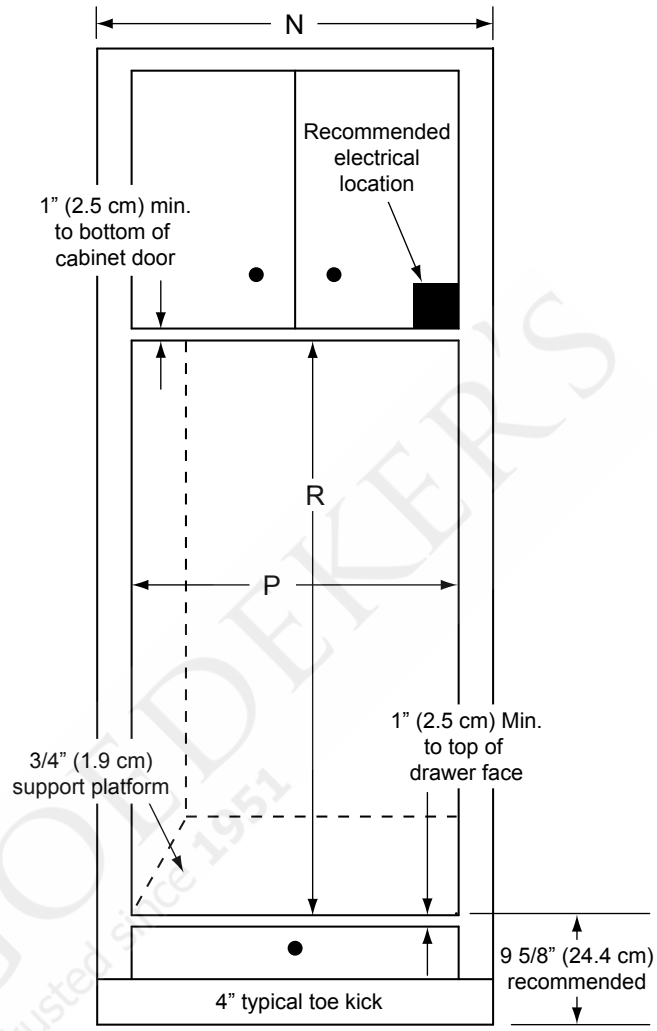
N
Recommended electrical location
1” (2.5 cm) min. to bottom of cabinet door
R
P
1” (2.5 cm) Min. to top of drawer face
3/4” (1.9 cm) support platform
9 5/8” (24.4 cm) recommended
4” typical toe kick

DOUBLE WALL OVEN - CUTOUT DIMENSIONS

(N) Minimum Cabinet Width	(P) Minimum Cut Out Width	(R) Minimum Cutout Height
30” (76.2 cm)	28 ½” (72.4 cm)	49 1/8” (124.8 cm)

Minimum Interior Cabinet Depth: 24” (61.0 cm)

GOEDEKERS Trusted since 1951